



ICSee V1.3.48@IOS

Introduction

2021-3-13

Synopsis


ICSee is a mobile terminal video surveillance software specially developed for some monitoring devices (Fish-eye light bulbs, fish-eye light rain, etc.).

The manual will mainly introduce how to use ICSee.



Construction of family memory changes in family life

CONTENTS



1

About Login

2

Add Device

3

Main Menu

4

Live Video


About login —Three Ways to Login

No SIM

10:44

50%

Log In

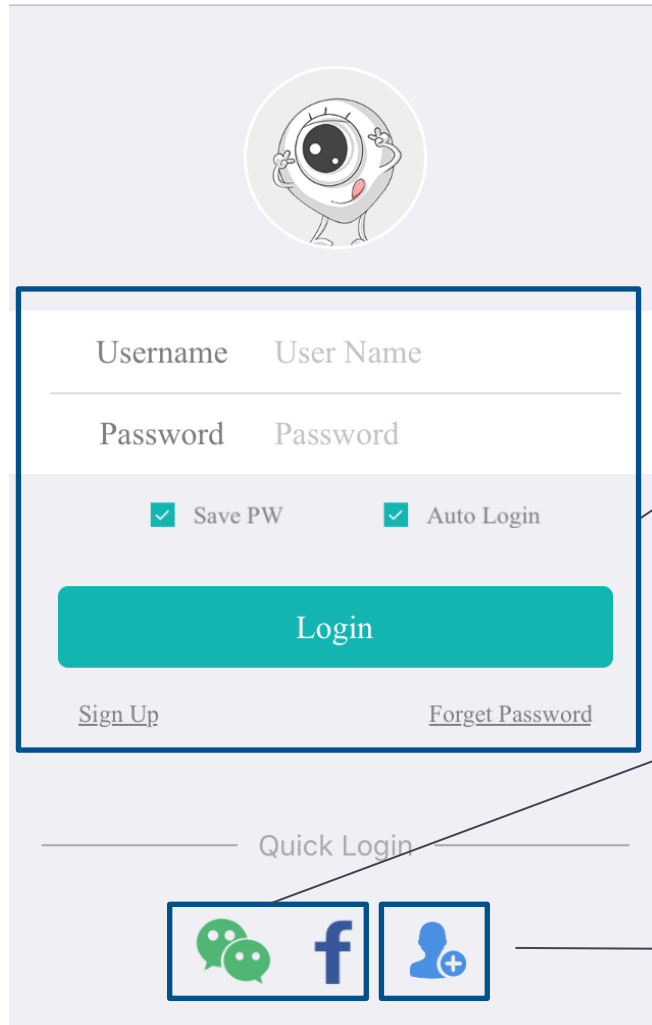

The login screen features a cartoon character at the top. Below it is a form with fields for 'Username' (labeled 'User Name') and 'Password'. There are checkboxes for 'Save PW' and 'Auto Login'. A large teal 'Login' button is centered. At the bottom of the form are links for 'Sign Up' and 'Forget Password'. Below the form is a 'Quick Login' section with three icons: WeChat, Facebook, and a generic user icon with a plus sign.

Account login

You can login with your account and password before you connect the device, if you are the first to use it ,you have register firstly

Quickly login

You can use WeChat or Facebook to authorize login.

Temporary Login

You can connect to the device directly without register an account.

About login —Register user

No SIM 50%

10:44

Log In



Username

User Name

Password

Password

☒ Save PW

☒ Auto Login

Login

[Sign Up](#)

[Forget Password](#)

Quick Login



No SIM

15:21

49%



User Register

Username

4-32 characters,numbers(cannot be a pure number)

Username

8-32 digit with the combination of character and...

Please Input Password



Confirm New Password





Complete

Register user

- User name is composed of 4-32 bit Chinese ,English , numbers and underline.
- Password contains 8-32 characters , and must include letters and numbers
- Use email to get register code or get password when you forget it.

Add Device

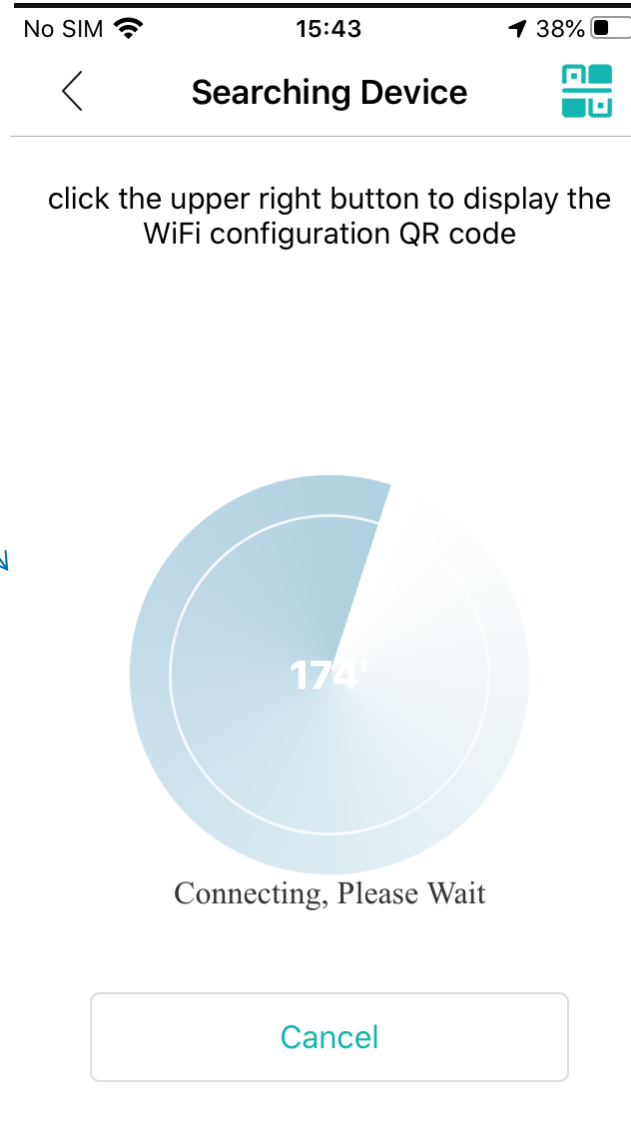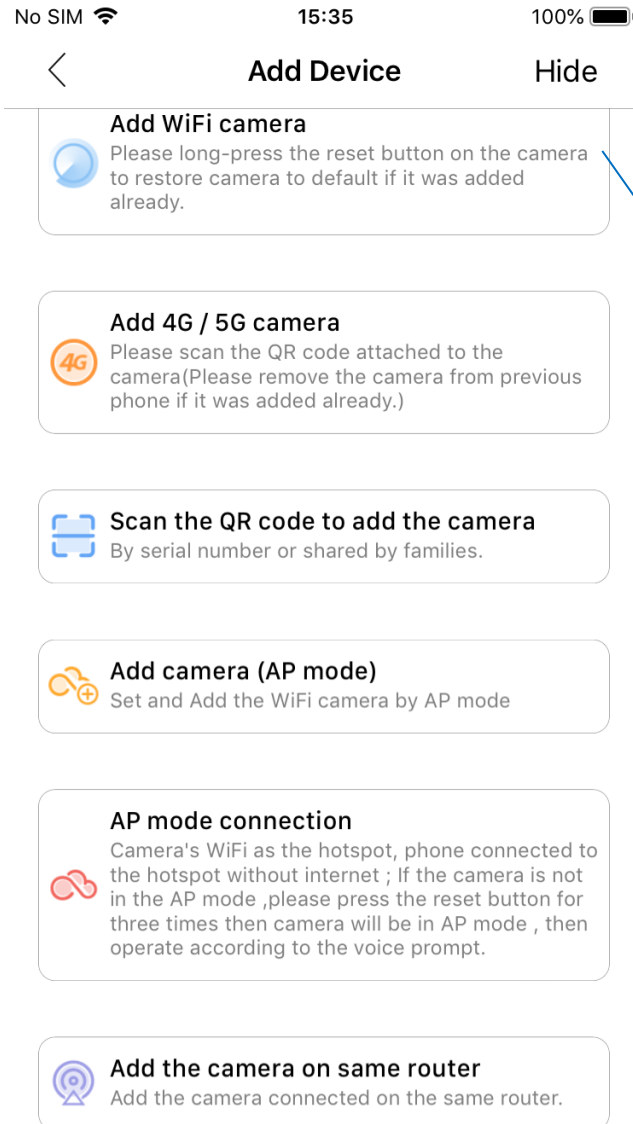

NOTE: Before you search the device ,switch -on your device firstly , then it will start the quick-set configuration

Add WiFi Camera

- Click "Add WiFi Camera" ,
- Set the WIFI
- search the device
- Set password
- Choose a name

Add Device

No SIM 15:35 100%

< Add Device Hide

Add WiFi camera
Please long-press the reset button on the camera to restore camera to default if it was added already.

Add 4G / 5G camera
Please scan the QR code attached to the camera(Please remove the camera from previous phone if it was added already.)

Scan the QR code to add the camera
By serial number or shared by families.

Add camera (AP mode)
Set and Add the WiFi camera by AP mode

AP mode connection
Camera's WiFi as the hotspot, phone connected to the hotspot without internet ; If the camera is not in the AP mode ,please press the reset button for three times then camera will be in AP mode , then operate according to the voice prompt.

Add the camera on same router
Add the camera connected on the same router.

No SIM 15:44 34%

< Add Device Mobile Storage

Enter serial number or shared

Confirm Add



Scan Device QR Code

Add 4G/5G Camera

You can add the device use the serial number or you can scan the device QR Code to add the device.

Add Device

No SIM 15:35 100%

< Add Device Hide

**Add WiFi camera**
Please long-press the reset button on the camera to restore camera to default if it was added already.

**Add 4G / 5G camera**
Please scan the QR code attached to the camera(Please remove the camera from previous phone if it was added already.)

**Scan the QR code to add the camera**
By serial number or shared by families.

**Add camera (AP mode)**
Set and Add the WiFi camera by AP mode

**AP mode connection**
Camera's WiFi as the hotspot, phone connected to the hotspot without internet ; If the camera is not in the AP mode ,please press the reset button for three times then camera will be in AP mode , then operate according to the voice prompt.

**Add the camera on same router**
Add the camera connected on the same router.

No SIM 15:47 32%

< Add Device Mobile Storage

Enter serial number or shared

Monitor ▲

Confirm Add

Monitor

Robot

Fish Fun

UFO

IDR

Bullet





Scan Device QR Code

Scan the QR code to add the camera

You can add the device use the serial number or shared by families or you can scan the device QR Code to add the device.



Add Device

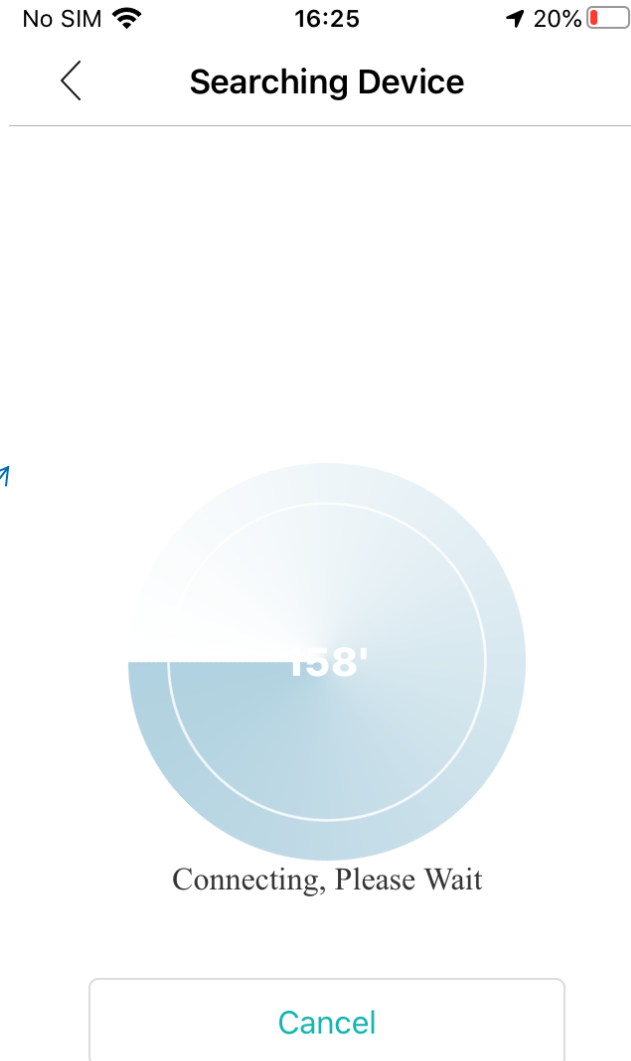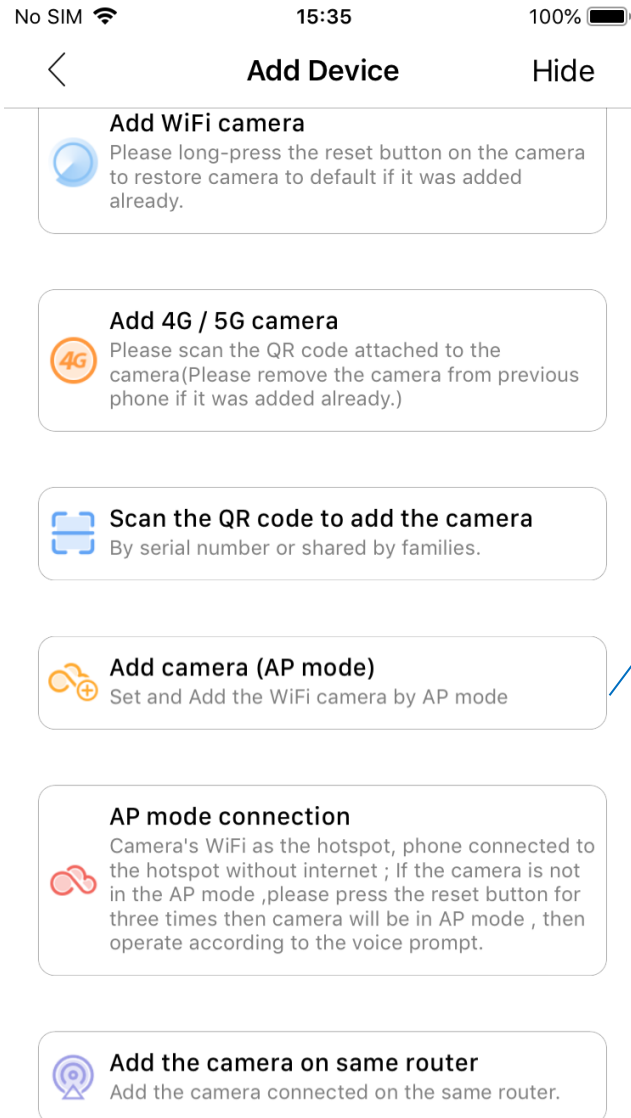

Add camera(AP mode)

- Click "Add Camera(AP mode)"
- Connect to AP device hotspot
- Set the WIFI
- search the device
- Set password
- Choose a name

Add Device

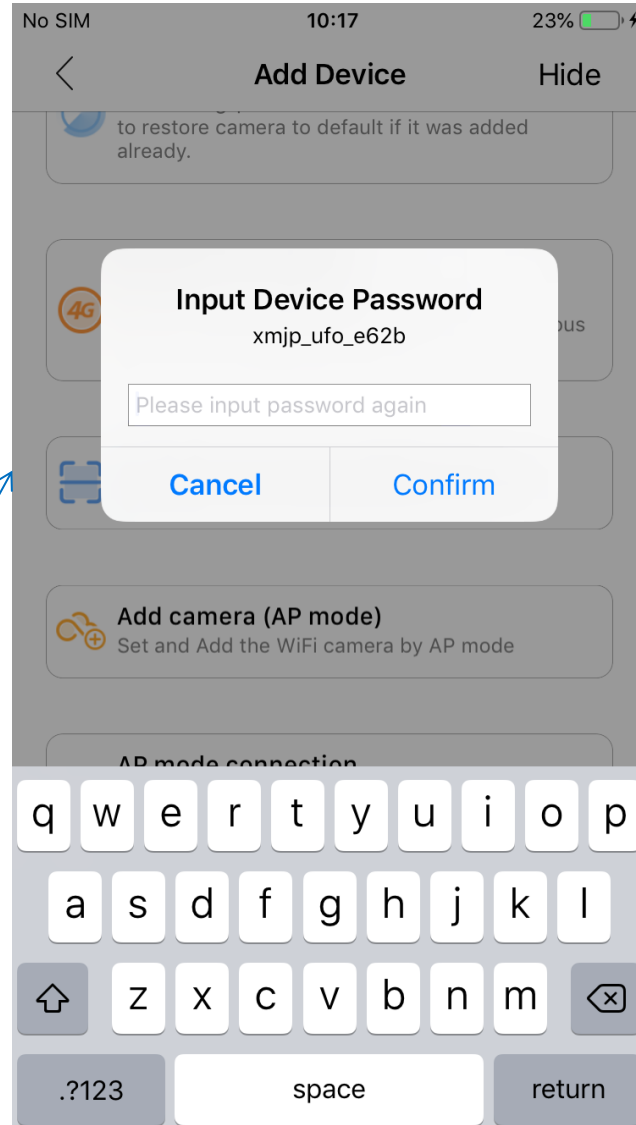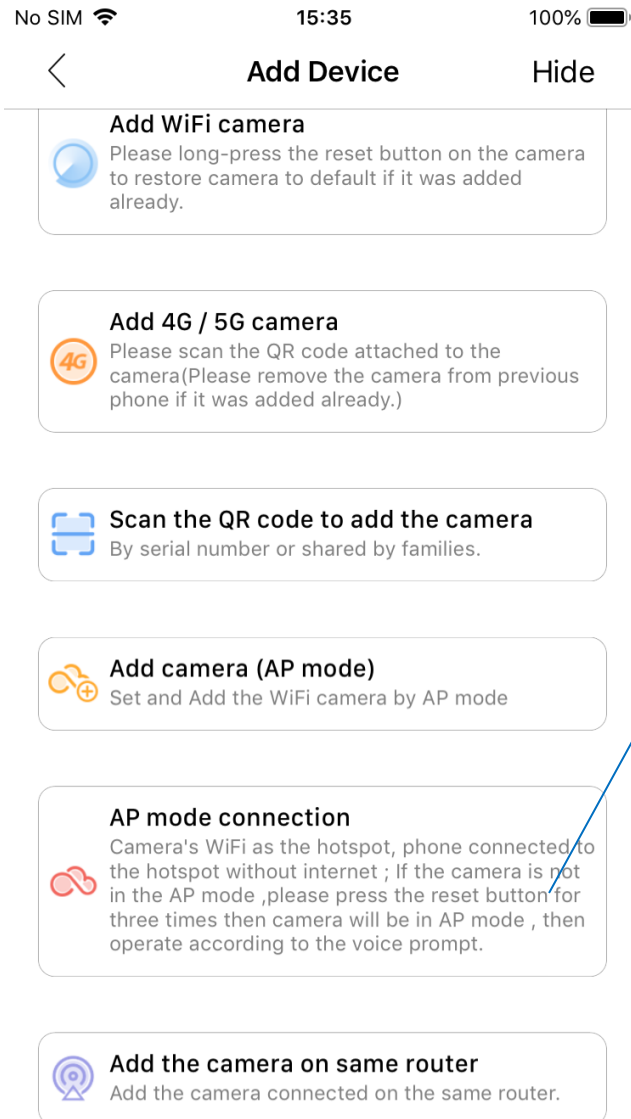

AP mode connection

- Click "AP mode connection"
- Select device hotspot
- Input device password

Add Device

No SIM

15:35

100%

<

Add Device

Hide



Add WiFi camera
Please long-press the reset button on the camera to restore camera to default if it was added already.



Add 4G / 5G camera
Please scan the QR code attached to the camera(Please remove the camera from previous phone if it was added already.)



Scan the QR code to add the camera
By serial number or shared by families.



Add camera (AP mode)
Set and Add the WiFi camera by AP mode



AP mode connection
Camera's WiFi as the hotspot, phone connected to the hotspot without internet ; If the camera is not in the AP mode ,please press the reset button for three times then camera will be in AP mode , then operate according to the voice prompt.



Add the camera on same router
Add the camera connected on the same router.

No SIM

10:25

28%

<

Searching Device



LocalHost
c57a2f6ce4e6ecfd
192.168.3.47



LocalHost
ae383005c3bcadc4
192.168.17.41



LocalHost
9a9279200f606a78
192.168.3.232



xmjp_bullet_a141
51935158a314aca5
192.168.3.160



LocalHost
571a0fbe7faad1c7
192.168.10.3



LocalHost
35ea3b2f01a2dc63
192.168.99.97



xmjp_bullet_1a03
e97e65766a0be512
192.168.3.159



LocalHost
006b5b88bc31976d
192.168.3.215



xmjp_bullet_ae02
b25cf4637bee5387
192.168.3.80



xmjp_seye_dcb2
d597ea57e4cfa957
192.168.3.148

Add the camera on same router

You can add the device which under the same WIFI.

Main Menu

Delete Device


Long-press this thumbnail ,
you can delete the device.

Mobile Storage

Here you can check the snapshot
pictures and records which you cut.

Device

Then you can find the device you just
added.

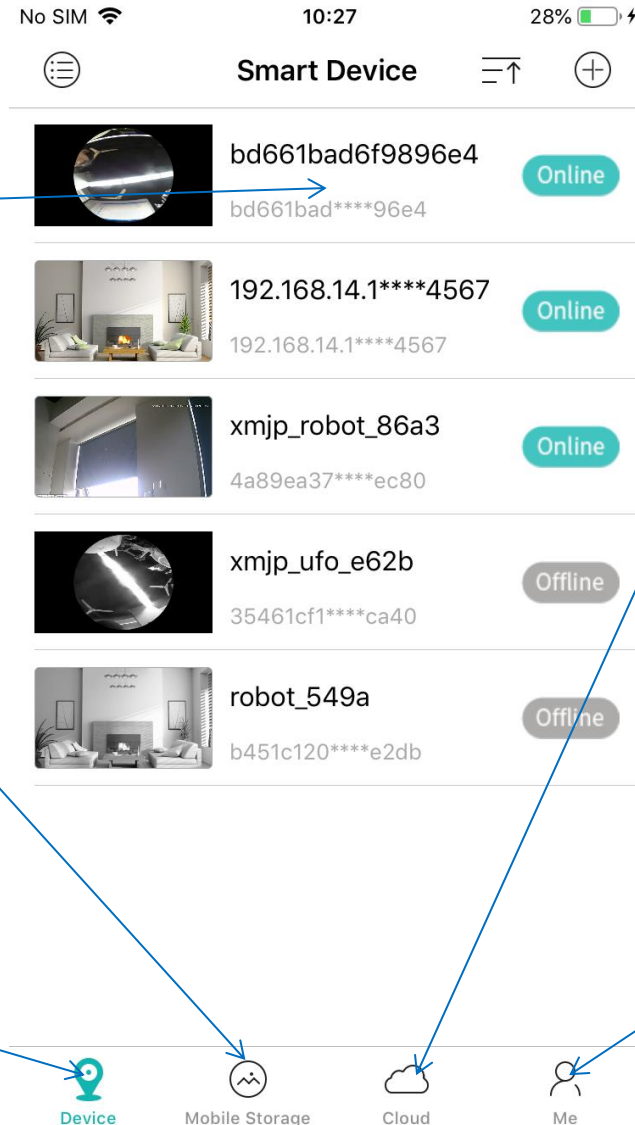

Cloud

Online storage function on the
Internet, you can activate the
alarm service and obtain cloud
storage privileges.

Me

- Account
- Sharing Management
- Feedback
- Help
- Tools
- About

Live Video



Settings


NOTE: This is fish-eye light rain Live Video interface

Here is the audio, definition , view , clips which you can clip the video what you want, full-screen.

Playback
Long press to intercom
Snapshot

- Playback : playback the video or view the snapshots → detailed information please refer to “Live Video-Playback”
- Long press to intercom : use the intercom function
- Snapshot : click it to snapshot

Live Video

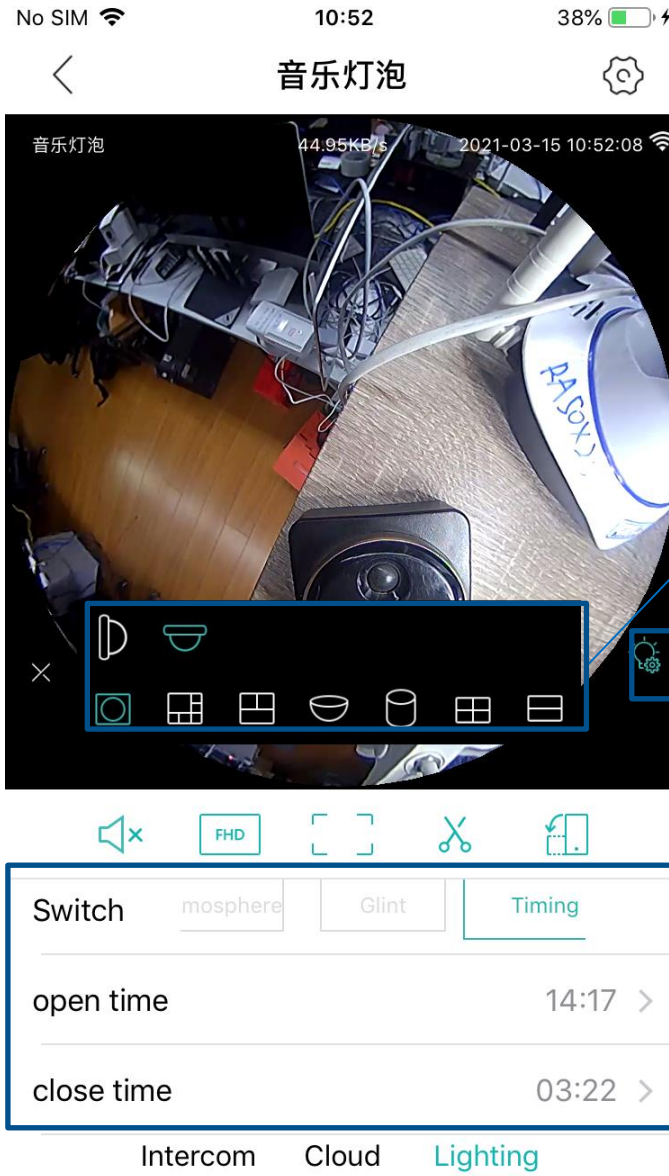


NOTE: This is Fish-eye light bulbs Live Video interface which is a little different from the fish-eye light rain

- Here you can choose Ceiling mode or Wall hanging mode

- Click here you can open/close Fish-eye light bulb function settings.

- Switch : Here you can turn on/off the bulbs or set time period.

Live Video-Playback

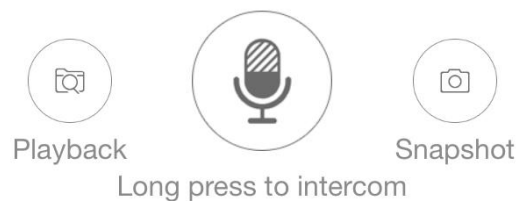

Intercom PTZ

Click "Playback", then appear the below page which you can playback or check the snapshot




Cancel



data

Long-press thumbnail to download video

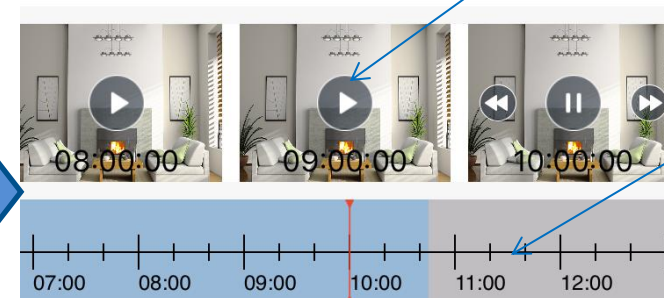




Time Line

2021-03-15

- ☒ Regular
- ☒ Alarm

Hour Mins

Live Video—Settings

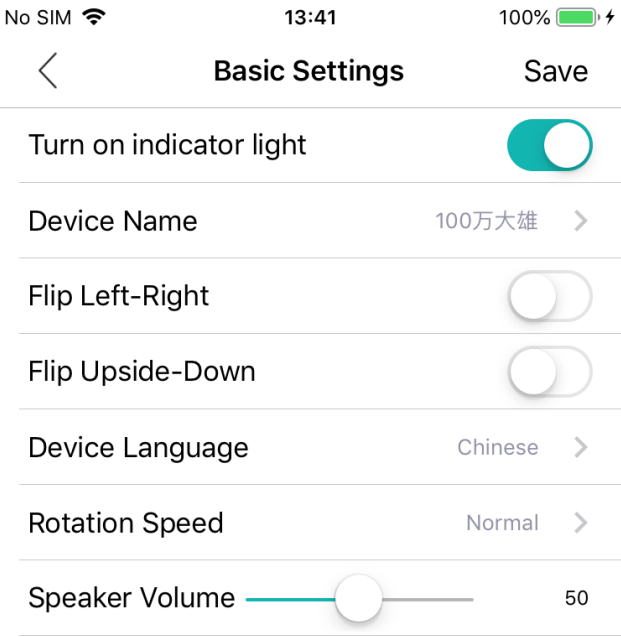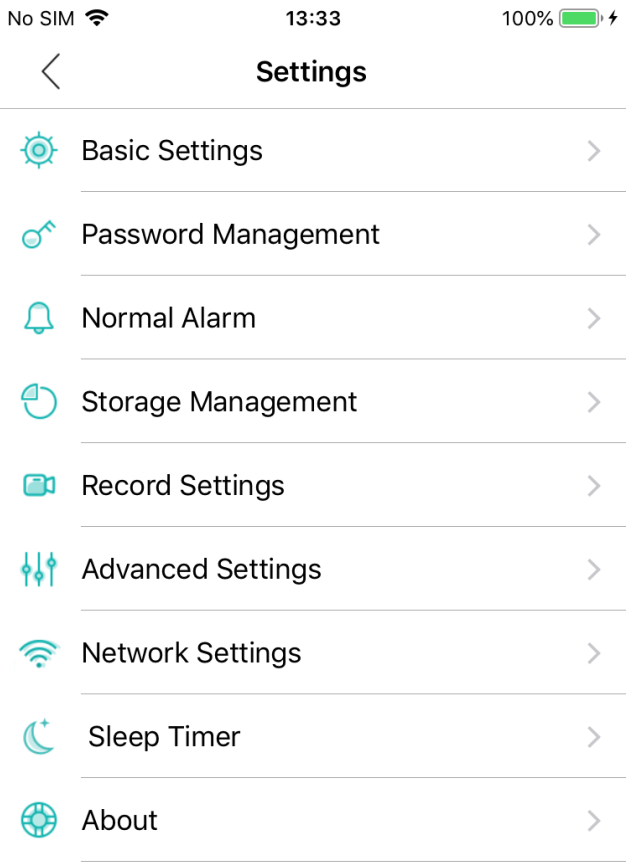

Basic Setting

Here you can modify the basic settings of the device such as name, language, head shaking speed, etc.

Live Video—Settings

No SIM 13:33 100%

< Settings

 Basic Settings >

 Password Management >

 Normal Alarm >

 Storage Management >


 Record Settings >

 Advanced Settings >

 Network Settings >

 Sleep Timer >

 About >



No SIM 13:27 100%

< Set Password

Current Password 

New Password 



Confirm Password 

Save

Password Management

Here you can modify the password




Live Video—Settings

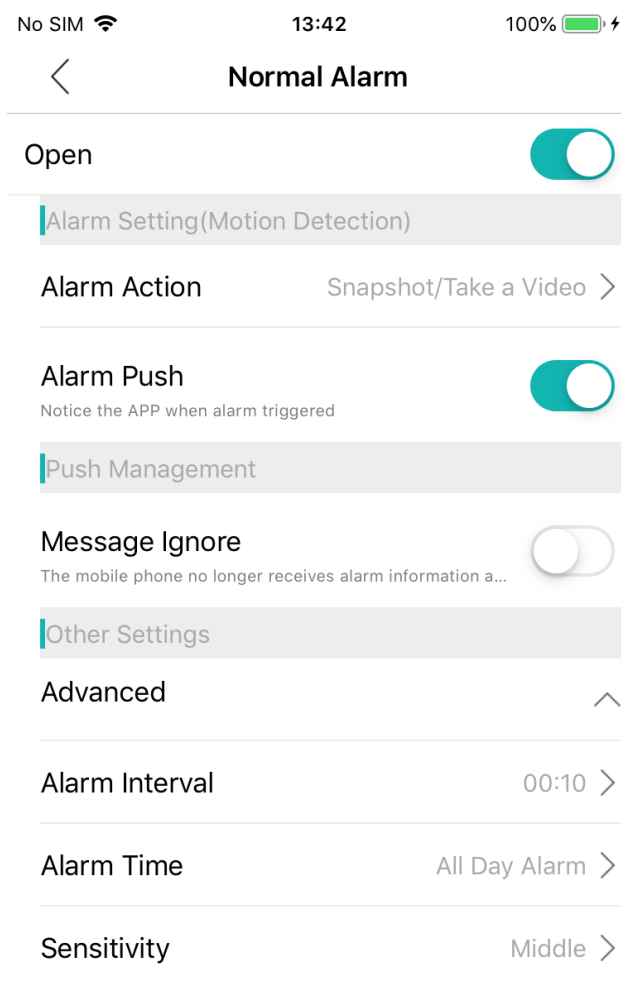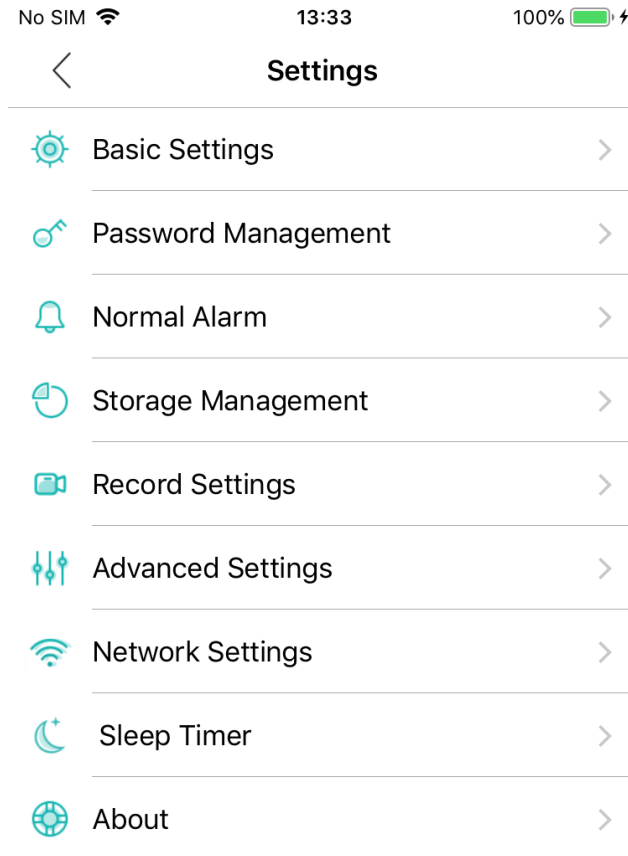

Normal Alarm

After the alarm is turned on, you can set the alarm mode, time interval, alarm period, alarm sensitivity and mobile phone push.

Live Video—Settings

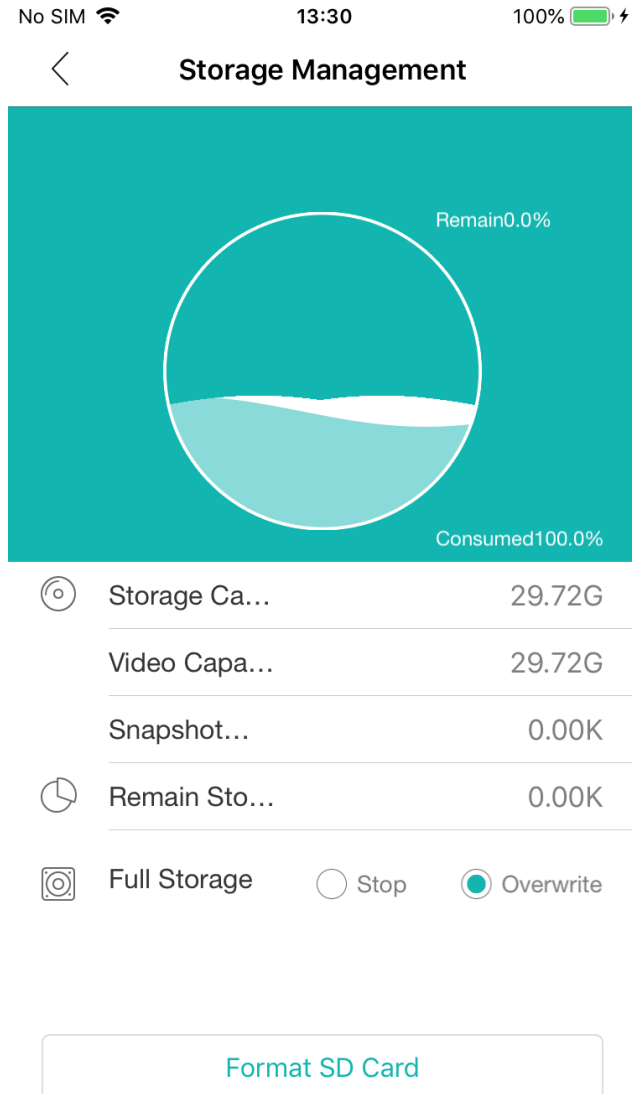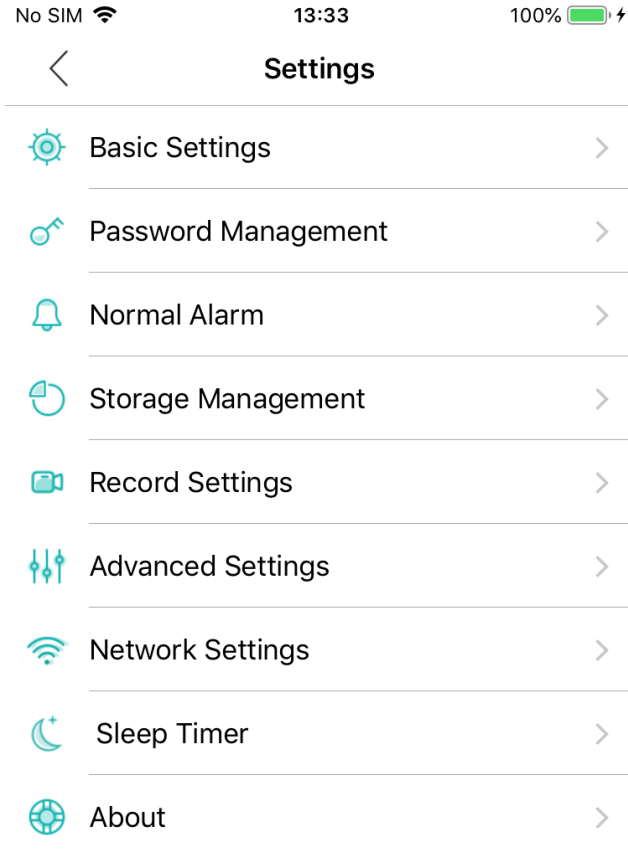

Storage Management

Here you can set the storage settings.

Live Video—Settings

No SIM 13:33 100%

< Settings

 Basic Settings >

 Password Management >

 Normal Alarm >

 Storage Management >


 Record Settings >

 Advanced Settings >

 Network Settings >

 Sleep Timer >

 About >



No SIM 13:51 100%

< Record Settings Save

Record Switch 

Pack Duration  5Mins
The Max duration of a single video



Audio 
Audio will not be recorded when turn it off

Record Quality Good >

Record Settings

Here you can modify video settings.

Live Video—Settings

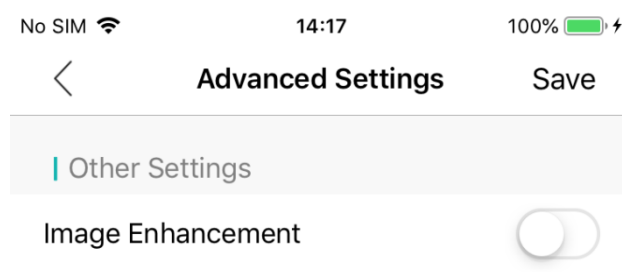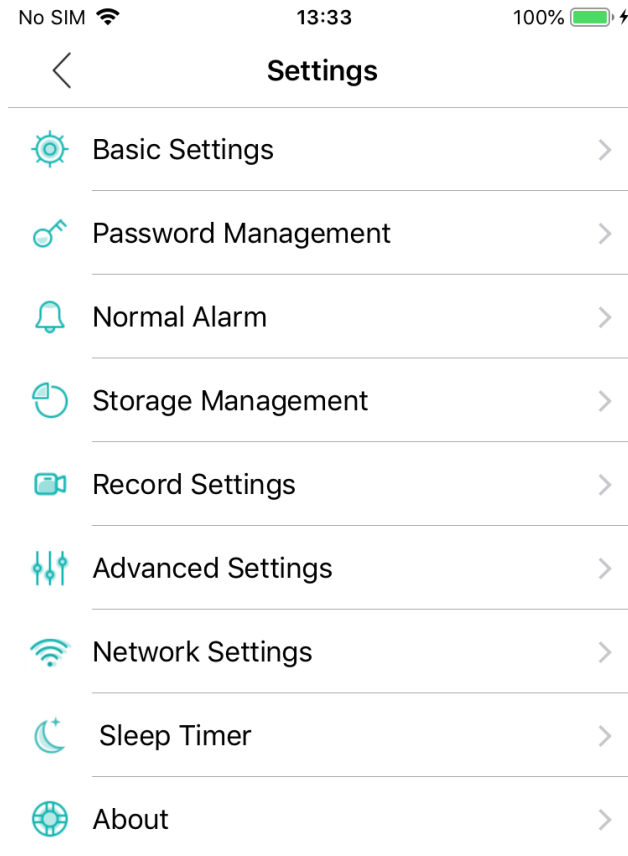

Advanced Management

You can turn on the Image Enhancement.

Live Video—Settings

No SIM

13:33

100%

Settings

Basic Settings

Password Management

Normal Alarm

Storage Management


Record Settings

Advanced Settings

Network Settings

Sleep Timer

About



No SIM

13:58

100%

Network Settings

AP Mode

Routing Mode

中文WiFi配网测试

WIFI list

* Note: If you can not find a WiFi to connect to your device, refres...

Save

Network Settings

Here you can choose AP Mode or Routing Mode.

Live Video—Settings

No SIM 13:33 100%

< Settings

 Basic Settings >

 Password Management >

 Normal Alarm >

 Storage Management >


 Record Settings >

 Advanced Settings >

 Network Settings >

 Sleep Timer >

 About >



No SIM 14:05 100%

< Sleep Timer Save

Open Sleep Timer

The device preview screen cannot be viewed after opening. The device cannot be videot... 

Repeat Type

Only >

Sleep Timer

Start Time

10:30 >

End Time

23:59 >

Sleep Timer

Here you can turn on sleep mode, set sleep mode and sleep timer.

Live Video—Settings

No SIM 13:33 100%

< Settings

 Basic Settings >

 Password Management >

 Normal Alarm >

 Storage Management >


 Record Settings >

 Advanced Settings >

 Network Settings >

 Sleep Timer >

 About >



No SIM 13:31 100%

< About Device



Serial Number84cd756c****ccf2

Device VersionHI3518E_RA50H10L_8188_S39

SoftwareV4.02.R12.00007810.10000.130302.00000

Post StatusRelease

Release Date2016-05-20 15:34:49

Equipment Time ZoneEast8(Area)

Device Time2021-03-15 13:31:39
[Click here to sync the device time with your phone](#)


Restore factory settings

Device Reboot

General

Here is the device information.


Menu—Alarm/Message

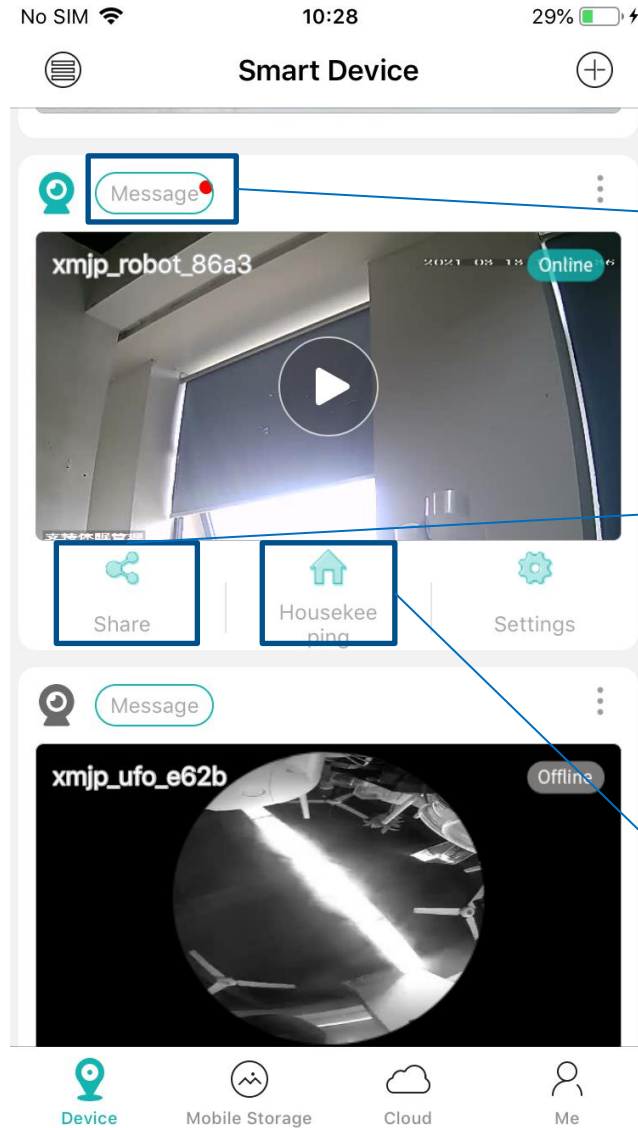

Message : When motion happened , you can go to Device List Interface to check the message.

Share :You can share the device with other users.

Alarm: When you set the alarm correctly, alarm message pushed to your mobile immediately like this.

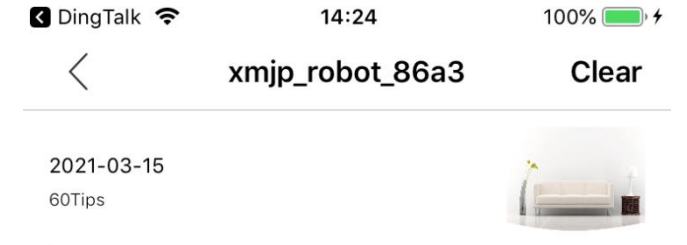

A hand is shown peeling a white sheet from a blue background. The white sheet is being lifted from the bottom left corner, revealing the blue surface underneath. The text "Thank You" is written in blue on the white sheet.

Thank You

2021-3-13