



The using document instructions of Device Manage


1. Installation steps:




- 1) Find in the disc and double-click the file, pop up the dialog box shown in the diagram below.

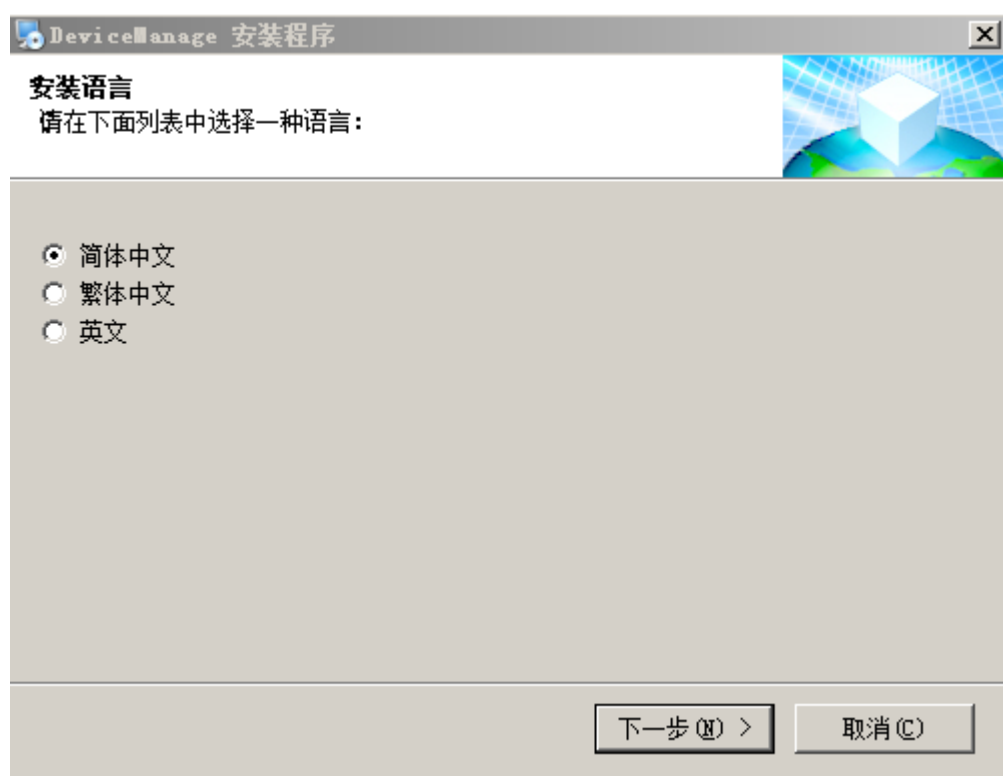


- 2) Click "next", pop up the dialog box shown in the diagram below.

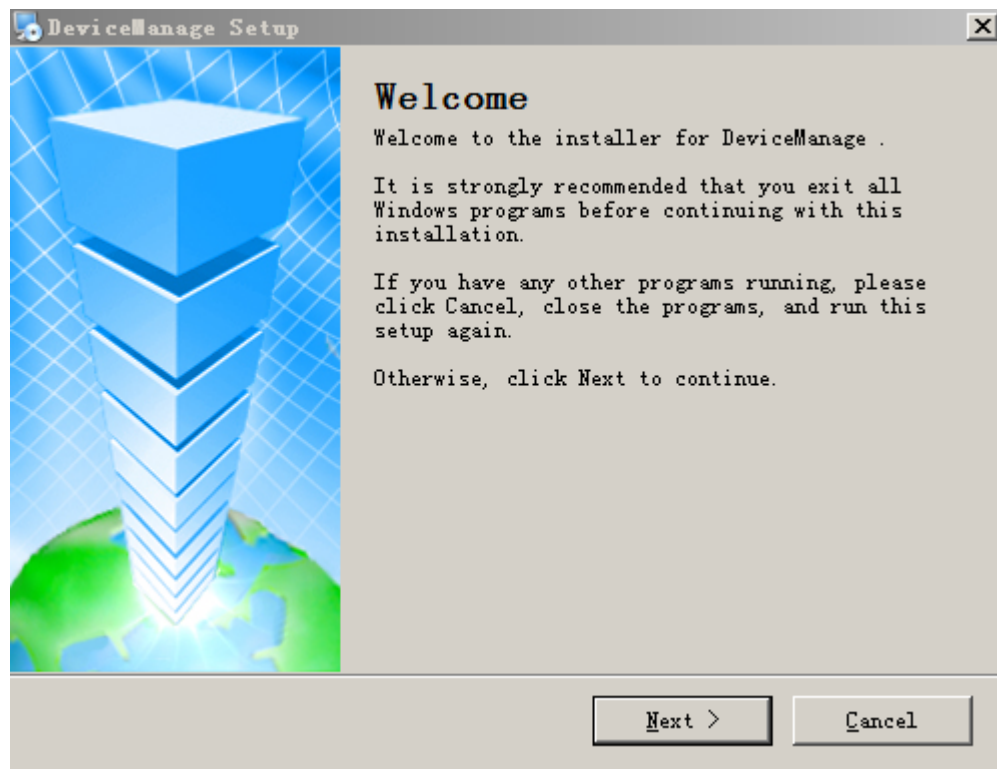


- 3) Click “next”, pop up the dialog box shown in the diagram below.

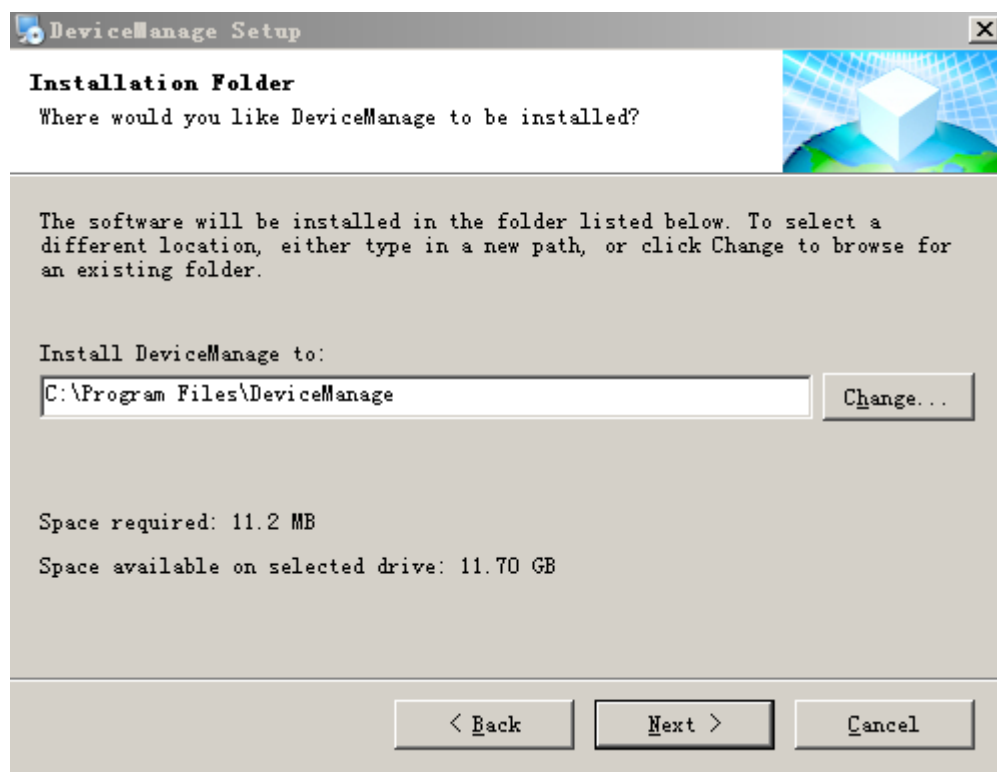


- 4) Press the “change” button, , select the installation pat, the system default folder is “C:\Program Files\JF-Device Manager”, Click “next”, pop up the dialog box shown in the diagram below.

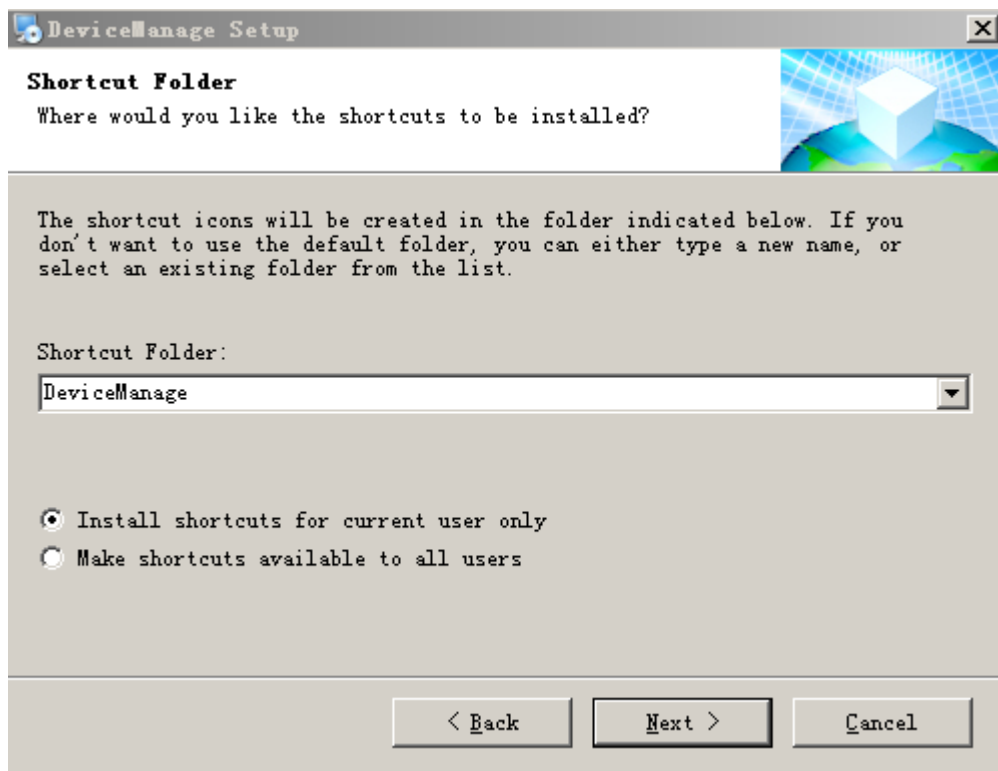


- 5) Input the user message, click “next”, start to install Player, pop up the dialog box shown in the diagram below.

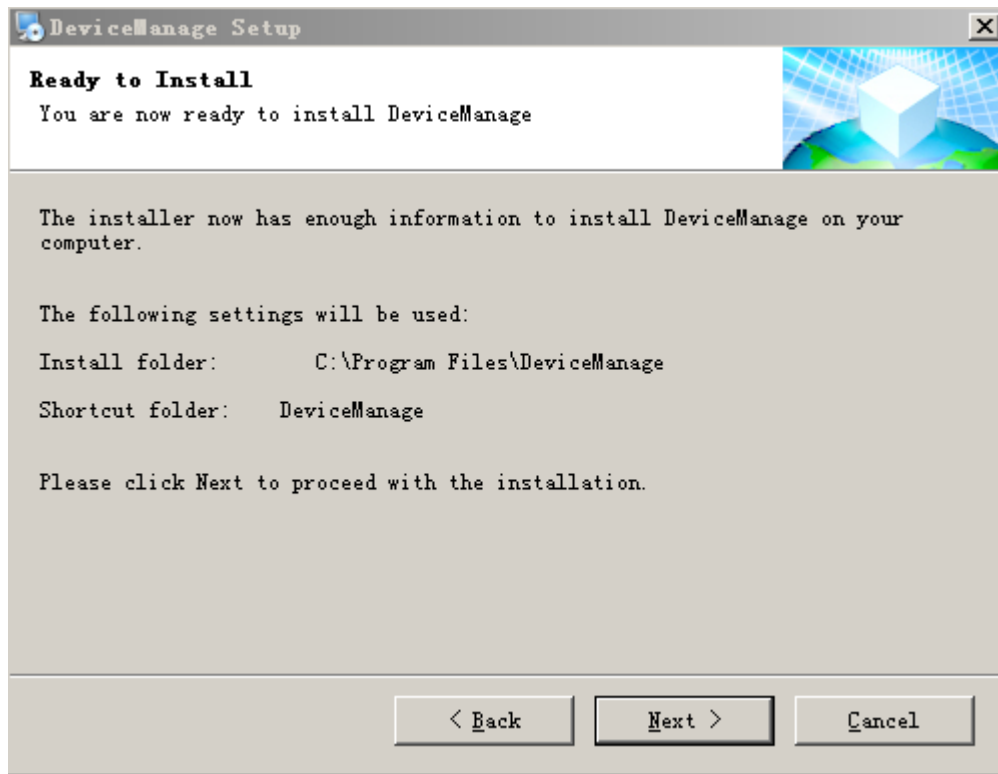

- 6) Click “next”, pop up the dialog box shown in the diagram below.

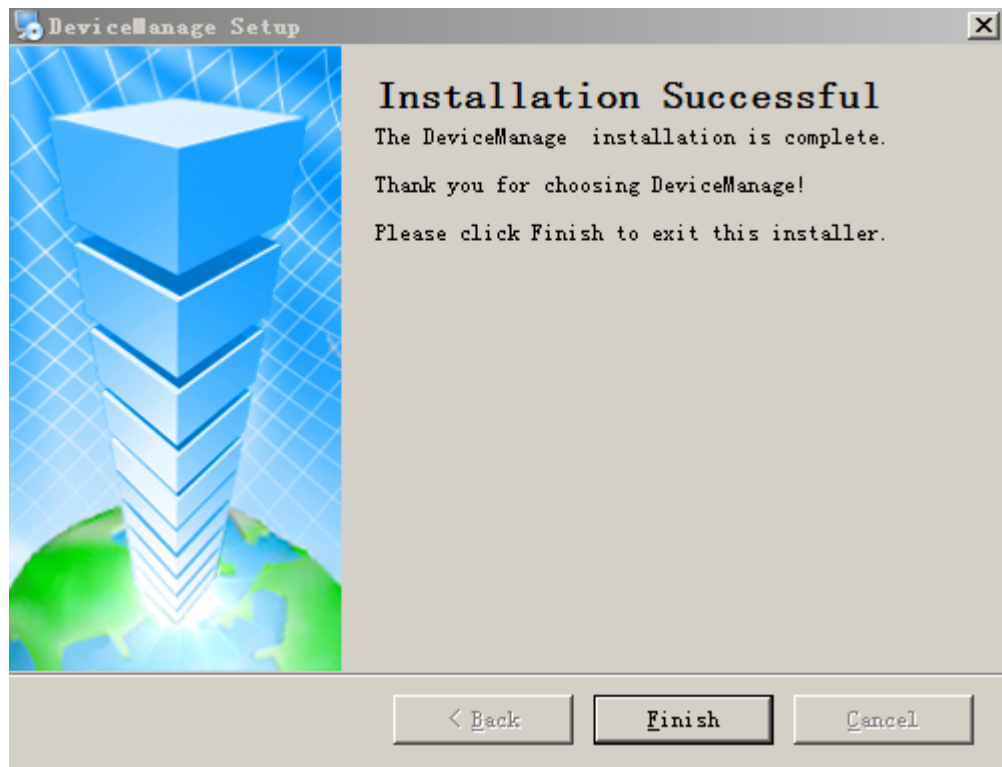

- 7) Click “finish” button to complete the installation. At this moment, the desktop will appear the



following icon

2. Device Manage interface is as follows:

NO.	IP Address	Port	Destrie	Mac Address	CloudID
-----	------------	------	---------	-------------	---------

IP Address: . . .
Subnet Mask: . . .
Gateway: . . .
SameToPc
HTTPPort:
TCPPort:
Mac Address:
CloudID:
adminPsw:
Modify
Advance

SelectAll IP Search Add Device WebBrowse Reboot ResetConfig

DirPath:
Browse Export
FileName:
Browse Upgrade

- 1) Search device

NO.	IP Address	Port	Destrie	Mac Address	CloudID
☐ 1	10.10.48.7	34567		00:3e:0d:40:17:7f	4919d1ae348
☐ 2	10.10.48.21	34567		00:43:8f:88:00:01	fc664991f48
☐ 3	10.10.48.40	34567		00:12:14:20:07:7a	a301bed2d6
☐ 4	10.10.48.41	34567		00:12:14:20:0e:49	2b095de923
☐ 5	10.10.48.51	34567		00:0b:3d:10:34:23	18be97398f
☐ 6	10.10.48.56	34567		00:3e:0b:05:b5:a2	2354e92824
☐ 7	10.10.48.57	34567		00:12:12:06:81:4b	61873ea5cc
☐ 8	10.10.48.58	34567		00:3e:0b:d2:1e:cb	dfb0f86d83
☐ 9	10.10.48.59	34567		00:12:12:82:ab:6d	955bbdabf3
☐ 10	10.10.48.61	34567		00:12:12:1f:8b:c8	7da8f9353b
☐ 11	10.10.48.62	34567		00:3e:0b:05:b6:21	b7452cc21d
☐ 12	10.10.48.63	34567		00:12:13:3a:19:0e	57be916fb5
☐ 13	10.10.48.65	34567		00:12:12:30:c4:f3	b153177cc
☐ 14	10.10.48.91	34567		00:12:14:20:07:ba	90631dd5cb
☐ 15	10.10.48.109	34567		00:12:12:21:31:0a	0045edcdbe
☐ 16	10.10.48.110	34567		00:0b:33:72:00:01	c501906ca1

IP Address: 0 . 0 . 0 . 0
Subnet Mask: 0 . 0 . 0 . 0
Gateway: 0 . 0 . 0 . 0
SameToPc
HTTPPort:
TCPPort:
Mac Address:
CloudID:
adminPsw:
Modify
Advance

SelectAll IP Search Add Device WebBrowse Reboot ResetConfig

DirPath:
Browse Export
FileName:
Browse Upgrade

- 2) Modify the network parameters: select a device, in the action bar on the right can modify the network parameters of the IP address, subnet mask, default gateway, HTTP port, TCP port, then the network parameters of the device modified successfully; click on the “consistent with the local PC” can make the subnet mask and default gateway fit

to the PC.


IP Address	10 . 10 . 48 . 61
Subnet Mask	255 . 255 . 240 . 0
Gateway	10 . 10 . 48 . 1
	SameToPc
HTTPPort	80
TCPPort	34567
Mac Address	00:12:12:1f:8b:c8
CloudID	7da8f9353b254e72
	Modify
adminPsw	Advance

- 3) Advanced; configure the DNS, mobile phone monitoring enabled, DDNS, WIFI, etc.

Advance		X
DNS1	192 . 168 . 1 . 1	
DNS2	8 . 8 . 8 . 8	SameToPc
PhoneInfo		
Enable	☒	
Port	34599	
DDNSType		
DDNSType	CN99	Regisiter
Enable	☐	
DomainName	your.3322.org	
DDNSName		
Passwd		
Wifi	Setting	
Save		Cancel

- 4) Device upgrade firmware: select the device needs to upgrade, click the “browse” button
(generally the suffix for upgrade firmware is) select the firmware needs to upgrade,

click the “upgrade” button.

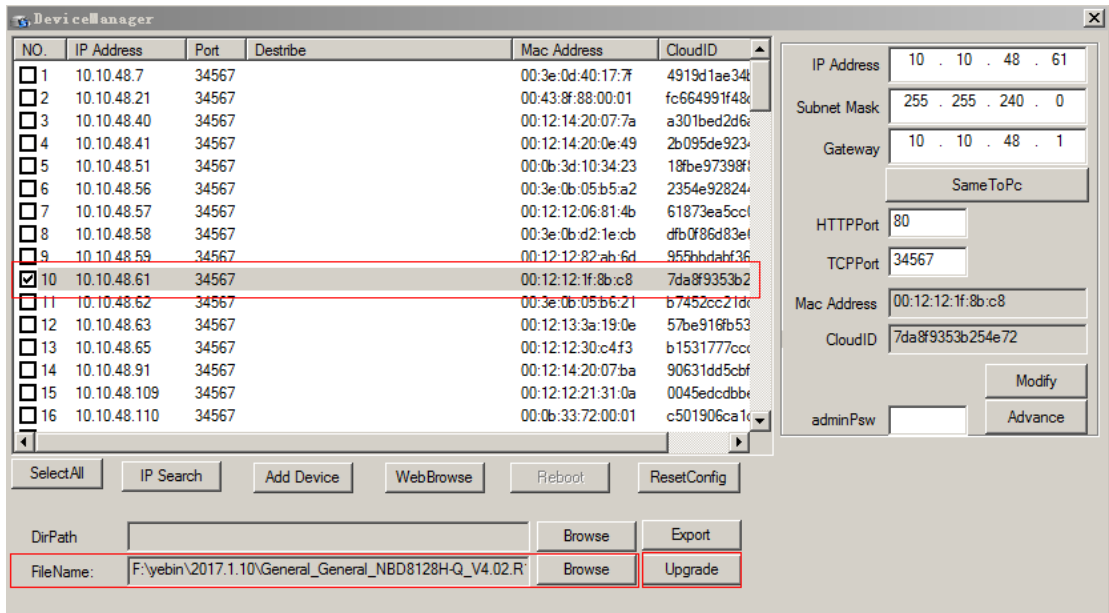

5) Other interface button

Add device: input the IP address, port, user name and password of the device can add device manually.

Web access: select the corresponding device, click on the web access, can access to the device directly through IE.

Restart device: select the device needs to restart, click on the restart device button, the corresponding device is started.

: